


Gummimåtter / Rubber mats

Ergo Solid

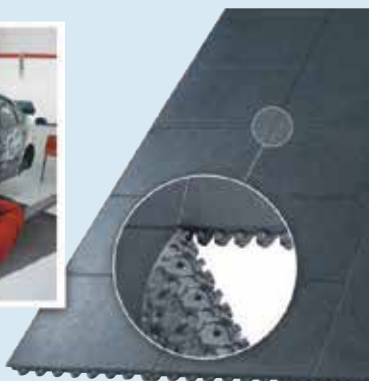

Ergo Solid - tegn på ergonomisk indsigt

Ergo Solid er en nitrilgummimåtte med fantastiske gode aflastnings-egenskaber og slidstyrke. Pladerne kan sammensættes fleksibelt uden anvendelse af samlingsstykker. Velegnet til arbejdspladser i industrien med enten tørt eller fedtet miljø.

- Tåler kontakt med varmt værktøj
- oliebestandig
- Ryg og ben aflastes effektivt, hvilket resulterer i høj produktivitet og lavere sygefravær
- Affasede kanter minimerer risikoen for at snuble - findes ligeledes i gul for markering af arbejdsområde m.v.

Ergo Solid - shows ergonomical knowledge

Ergo Solid is a wear-resistant nitril rubber mat with excellent strain relief. The sheets may be joined together without the use of fittings. Suitable for workplaces in the industrial field - for dry or greasy environments.

- Tolerates contact with hot tools
- Oil resistant
- Bag and legs are effectively relieved resulting in a high productivity and less absence due to sickness.
- Chamfered edges keep the risk of stumbling to a minimum
- Available in yellow to mark the work area etc.

| Art. | Name | Color | Size (m) | Height (mm) | Weight (kg) |
|--------------|--------------------|-------|-------------|-------------|-------------|
| 38.9726230 | Ergo Solid | Sort | 0,91 x 0,91 | 19 | 8,2 |
| 38.9730030* | Skrå kant - male | Sort | 0,08 x 0,91 | | 1 |
| 38.9750030 | Koppling | Sort | 0,03 x 0,23 | | 0,1 |
| 38.9730030S* | Skrå kant - female | | | | |

* Ved kant rundt om hele måtten. Bruges 2 han + 2 hun skråkanter. Grundmåtten har udvendige tappe på 2 sider.

* At the edge around the entire mat. Use 2 male + 2 female edges. The basic mat has exterior pins on 2 sides.

Ergo Bubble




Boblemåtte

Ergo Bubble er en traditionel boblemåtte fremstillet af skum-polyuretan. Materialet har unikke elastiske egenskaber som sammen med buerne i overfladen får benmusklerne til at arbejde og giver en god aflastning - samtidig med at den har meget høj slidstyrke. Måtten findes i flere standardstørrelser men kan derudover fremstilles efter dine specialmål. Samtlige Ergo Bubble har affasede kanter for at minimere snublerisikoen.

Er velegnet i alle tørre miljøer.

| Art. | Name | Color | Size (m) | Weight (kg) |
|------------|---------------|--------|-------------|-------------|
| 38.8100110 | Ergo Bubble | Grafit | 0,65 x 0,95 | 3,2 |
| 38.8100310 | Ergo Bubble * | Grafit | 0,65 x 1,8 | 4 |
| 38.8103110 | Ergo Bubble * | Grafit | 0,95 x 1,2 | 4 |



Kan skaffes i oliebestandig NBR /
Obtained in oil resistant NBR
0,65 x 1,4 m
0,95 x 1,5 m
0,95 x 1,8 m

Bubble mat

Ergo Bubble is a traditional bubble mat made from foam-polyurethane. The material has unique elastic properties which, together with the bubbles in the surface, make the leg muscles work and provide excellent strain relief - at the same time the mat is extremely hard-wearing.

Available in several standard sizes - or custom-designed according to your special dimensions. All Ergo Bubble have chamfered edges to reduce the risk of stumbling to a minimum.

Suitable for use in all dry environments.

Ergo Durk



En klassiker til mange arbejdspladser

Ergo Durk er en klassisk arbejdspladsmåtte med dørkmønstreret overside i nitrilgummi. Bagsiden er af EPDM-cellegummi med lukkede celler.

Kombinationen af disse miljøvenlige materialer giver en både slidstærk og behagelig måtte at stå på. Desuden yders der 5 års komplet slitagaranti.

Fås i standardmåtte fra rulle eller i specialmål efter tegning, alt med af-fasede kanter.

Ergo Durk ESD beskytter også følsomt elektronik imod statisk elektricitet. Måtten er godkendt i henhold til SP 2472.

| Art. | Name | Color | Size (m) | Weight (kg) |
|---------------|-----------|-------|----------|-------------|
| 38.5017530 ** | Ergo Durk | Sort | 1,4 x 1 | 6,6 |
| 38.5017530 ** | Ergo Durk | Sort | 1,4 x 10 | 66 |



* Måtten har en gummioverside og en underside af EPDM.

* The mat has a rubber top side and a bottom side of EPDM.

A Classic for Many Workplaces

Ergo Durk is a classic workplace mat with a surface patterned like the deck of a ship and the upper side made of nitrile rubber. The back side is made of EPDM cellular rubber with closed cells.

The combination of these environmentally compatible materials provides a both hard-wearing and pleasant mat. Furthermore, there is a five-year guarantee against wear.

Available as a standard mat in a roll or in sheets specially made according to drawing - all with chamfered edges.

Ergo Durk ESD also protects sensitive electronics against static electricity. The mat has been approved acc. to SP 2472.

Ergo Dome



Ergo Dome, god måtte til gunstig pris

Ergo Dome er en slidstærk måtte i naturgummi (SBR).

Den buleformede overflade stimulerer blodcirkulationen hvilket mindsker belastningsskader i ben og ryg.

Ergo dome, good mat at low prices.

Ergo dome is a durable mat of natural rubber (SBR).


The bulge-shaped surface stimulates blood circulation, which reduces stress injuries in the legs and back.

| Art. | Name | Color | Size (m) | Weight (kg) |
|-----------|-------------------------------|-------|-----------|-------------|
| 38.410200 | Ergo Dome | Sort | 0,6 x 0,9 | 3,2 |
| 38.410201 | Ergo Dome | Sort | 0,9 x 1,2 | 4 |
| 38.410203 | Ergo Dome Puzzle midterstykke | Sort | 0,9 x 1,2 | 4 |
| 38.410202 | Ergo Dome Puzzle, endestykke | Sort | 0,9 x 1,2 | 4 |

Puzzle er med sorte kanter, og det er muligt at samle 2 endestykker til f.eks. 2,4 m

Puzzle is with black borders, and it is possible to assemble two end pieces, for example 2.4 m.

Kan skaffes i oliebestandig NBR /
Obtained in oil resistant NBR
0,6 x 0,9 m
0,9 x 1,2 m



Gummimåtter / Rubber mats

Ergo Ring



Kan skaffes i / Obtained in
0,4 x 0,6 og 0,6 x 0,8



Skridsikker i vådt og tørt

Ergo Ring bortdræner effektivt væde og spildmateriale, hvilket sikrer en skridsikker overflade at stå på. Den åbne ringkonstruktion giver desuden en god aflastning.

- Kan samles, hvilket giver mulighed for store sammenhængende, skridsikre overflader
- Dræner effektivt, ideel ved bearbejdningsmaskiner eller i våde lokaler
- God som grov dørmatte i entreer
- Naturgummi med den rette hårdhed giver skridsikkerhed både i tørt og vådt miljø

Non-skid in wet and dry environment

Ergo Ring effectively drains off wet and waste material, which ensures a non-skid surface. The open annular construction provides an excellent strain relief.

- May be joined together to large coherent non-skid surfaces
- Drains effectively, ideal for machine tools or in wet premises
- Applicable as a coarse entrance door mat
- Natural rubber with the correct hardness provides skid resistance in both wet and dry environments.

| Art. | Name | Color | Size (m) | Height (mm) | Weight (kg) |
|------------|-------------|-------|-----------|-------------|-------------|
| 38.9117630 | Ergo Ring | Sort | 0,8 x 1,2 | 23 | 11 |
| 38.9117631 | Ergo Ring | Sort | 1 x 1,5 | 23 | 21 |
| 38.9110030 | Samlestykke | Sort | | | |

Ergo Ease



| Art. | Name | Color | Size (m) | Height (mm) | Weight (kg) |
|------------|-----------|-------|-------------|-------------|-------------|
| 38.9716230 | Ergo Ease | Sort | 0,91 x 0,91 | 14 | 8,2 kg |

Kan skaffes i terracottarød / Obtained in terracotta red

Ergo Ease - kongen af aflastning

Ergo Ease er en nitrilgummimåtte med ekstremt gode aflastningsegenskaber og slidstyrke. Pladerne kan sammensættes fleksibelt uden anvendelse af samlingsstykker.

Velegnede til arbejdspladser i industrien med enten tørt eller fedtet miljø.

- Tåler kontakt med varmt værktøj
- Oliebestandig
- Ryg og ben aflastes effektivt, hvilket resulterer i høj produktivitet og lavere sygefravær
- Affasede kanter minimerer risikoen for at snuble - findes ligeledes i gul for markering af arbejdsområde m.v.

Ergo Ease - first-quality strain relief

Ergo Ease is a wear-resistant nitril rubber mat with excellent strain relief. The sheets may be joined together without the use of fittings. Suitable for workplaces in the industrial field in a dry or greasy environment.

Tolerates contact with hot tools

Oil resistant


Back and legs are effectively relieved resulting in a high productivity and less absence due to sickness.

Chamfered edges keep the risk of stumbling to a minimum. Available in yellow to mark the work area etc.

Ergo Classic



| Art. | Name | Color | Size (m) | Weight (kg) |
|------------|--------------|-------|-------------|-------------|
| 38.5501110 | Ergo Classic | Grå | 0,61 x 18,3 | 36 kg |
| 38.5501210 | Ergo Classic | Grå | 0,91 x 18,3 | 50 kg |
| | Ergo Classic | Grå | 1,22 x 18,3 | |

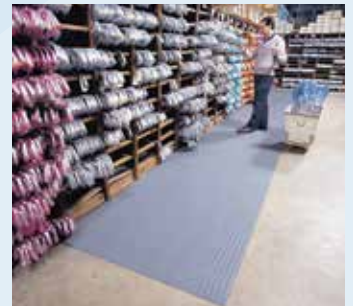

Skridsikker i vådt og tørt

Ergo Ring bortdræner effektivt væde og spildmateriale, hvilket sikrer en skridsikker overflade at stå på. Den åbne ringkonstruktion giver desuden en god aflastning.

- Kan samles, hvilket giver mulighed for store sammenhængende, skridsikre overflader
- Dræner effektivt, ideel ved bearbejdningsmaskiner eller i våde lokaler
- God som grov dørmåtte i entreer
- Naturgummi med den rette hårdhed giver skridsikkerhed både i tørt og vådt miljø

Non-skid in wet and dry environment

Ergo Ring effectively drains off wet and waste material, which ensures a non-skid surface. The open annular construction provides an excellent strain relief.

- May be joined together to large coherent non-skid surfaces
- Drains effectively, ideal for machine tools or in wet premises
- Applicable as a coarse entrance door mat
- Natural rubber with the correct hardness provides skid resistance in both wet and dry environments.

Fingertip




| Art. | Name | Color | Size (m) |
|-----------|-----------|-------|----------|
| 38.345522 | Fingertip | Sort | 0,8 x 1 |

Fingertip gummimåtte med skrå kant.

Fingertip rubber mat with beveled edge.

Smudsmåtter diamond blue / mat diamond blue

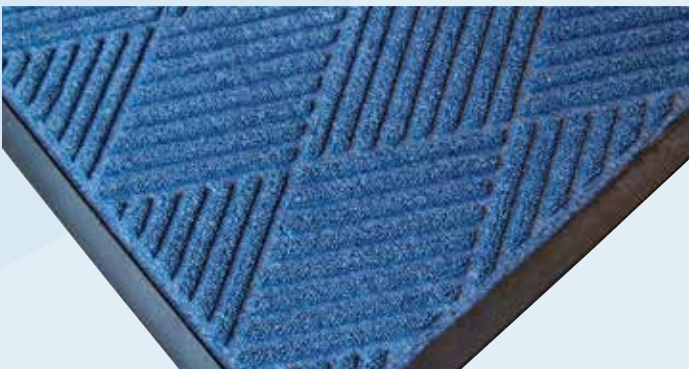

| Art. | Color | Size (m) |
|-----------|-------|-----------|
| 38.623750 | Blue | 0,9 x 1,5 |
| 38.623752 | Blue | 0,6 x 0,9 |
| 38.623764 | Blue | 1,2 x 1,8 |



Dørmåtte blå, polypropylen med gummiskråkant. Kan spules med højtryksrensere.

Blue mat, polypropylene with rubber beveled edge. Can be flushed with high-pressure cleaner.

Kan skaffes i grå / Obtained in grey

Gummimåtter / Rubber mats

Vibrationsmatte / Vibration mat

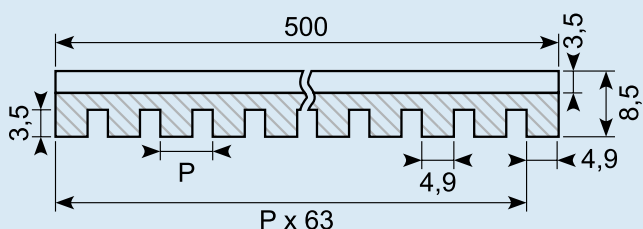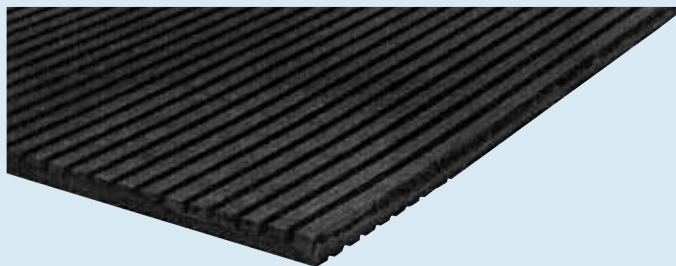


NR/SB


| Art. | Thickness (mm) | Width (mm) | Length (mm) | Insertion |
|--------|----------------|------------|-------------|-----------|
| 37.400 | 8,5 | 500 | 500 | 0 |

Sort, kommerciel gummiplade.
Anvendes mellem maskiner og gulv for at minimere og optage vibrationer.
Riller på begge sider.
Bæreevne 5 kg/cm²

Black commercial rubber plate.
To be used between machines and floor in order to minimize and absorb vibrations. Grooves on both sides.
Carrying capacity of 5 kg/cm².




Komåtte / Cow mat (NR / SBR)

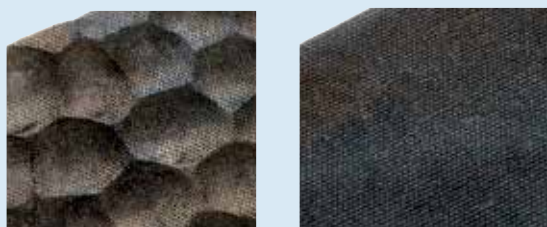

| Art. | Width (mm) | Length (mm) | Thickness (mm) | Shore | Density |
|-----------|------------|-------------|----------------|-------|---------|
| 38.440-6 | 2.000 | 30.000 | 6 | 65 | 1,45 |
| 38.440-8 | 2.000 | 30.000 | 8 | 65 | 1,45 |
| 38.440-8X | 1.250 | 10.000 | 8 | 65 | 1,45 |
| 38.440-6A | 1.750 | 21.000 | 6 | 65 | 1,45 |
| 38.440-8A | 1.750 | 21.000 | 8 | 65 | 1,45 |

Komåtte / Cow mat (NR / SBR)

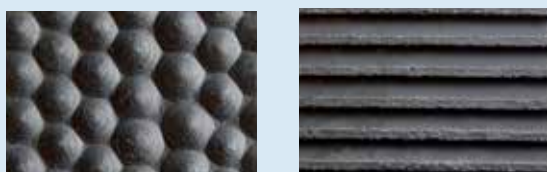

| Art. | Thickness (mm) | Width (mm) | Length (mm) |
|----------|----------------|------------|-------------|
| 37.260 | 10 | 2.000 | 20.000 |
| 37.261 * | 10 | 2.000 | 4.870 |
| 37.262 * | 10 | 2.000 | 6.522 |

37.280




Grisemåtte 1.810 x 1.210 x 30 mm.
Cirkler / hul bund uden indlæg.
Pigs mat 1.810 x 1.210 x 30 mm.
Circles / hollow bottom without insert.

37.263



Komåtte 2.200 x 10.000 x 16 mm. Overflade cirkler u/indlæg. Bund ribbet i længderetning.
Cow mat 2.200 x 10.000 x 16 mm. Surface circles without insert. The bottom ribbed in longitudinal direction.

37.270

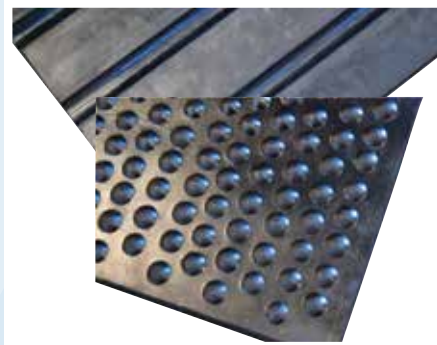

Komåtte 1.830 x 1.220 x 17 mm.
Knopper / ribbet bund uden indlæg.
Cow mat 1.830 x 1.220 x 17 mm. Studs / ribbed bottom without insert.

Traileråtte / Trailer mat




| Data | |
|---|----------|
| Gummi / Rubber | NR / SBR |
| Hårdhed / Hardness - Shore A | 65 |
| Densitet / Density - g/cm ³ | 1,4 |
| Arbejdstemperatur / Working temperature - °C | -25 +70 |
| Trækstyrke / Tensile strength - N/mm ² | 12 |

| Art. | Thickness (mm) | Width (mm) | Length (mm) |
|---------------|----------------|------------|-------------|
| 38.422-1350 | 6 | 1.350 | 21.000 |
| 38.422-1650 | 6 | 1.650 | 21.000 |
| 38.422-1750 * | 6 | 1.750 | 21.000 |
| 38.423-1650 | 8 | 1.650 | 21.000 |
| 38.423-1750 * | 8 | 1.750 | 21.000 |
| 38.424-1800 * | 8 | 1.800 | 21.000 |

* Skaffevare / Special order item

Klar PVC / Transparent PVC

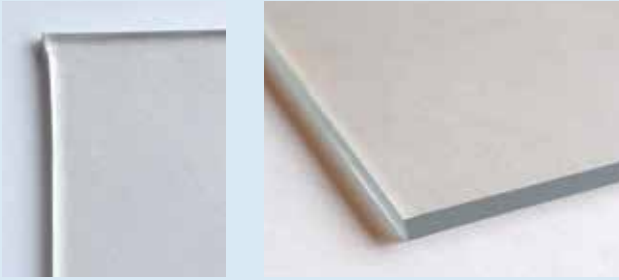

| Art. | Thickness (mm) | Width (mm) | Length (mm) |
|---------------|----------------|------------|-------------|
| 38.449-750 * | 3 | 750 | 20.000 |
| 38.449-1200 | 3 | 1.200 | 20.000 |
| 38.450-760 * | 4 | 760 | 13.000 |
| 38.451-1600 | 5 | 1.600 | 20.000 |
| 38.452-1200 * | 7 | 1.200 | 10.000 |

Polyurethanplader / Polyurethane plates




| Art. | Thickness (mm) | Width (mm) | Length (mm) | Stock |
|--------------|----------------|------------|-------------|-------|
| 38.430-5/70 | 5 | 2.000 | 1.000 | X |
| 38.430-5/80 | 5 | 2.000 | 1.000 | X |
| 38.430-8/70 | 8 | 2.000 | 1.000 | X |
| 38.430-8/90 | 8 | 2.000 | 1.000 | X |
| 38.430-10/70 | 10 | 2.000 | 1.000 | X |
| 38.430-10/90 | 10 | 2.000 | 1.000 | X |

**


| Data | | | | |
|---|----------|----------|----------|--|
| Hårdhed / Hardness - Shore A | 70 | 80 | 90 | |
| Forlængelse / Elongation | 500-600 | 450-500 | 400-450 | |
| Arbejdstemperatur / Working temperature - °C | -35 +100 | -35 +100 | -35 +100 | |
| Rivstyrke / Tear strength - KN/m | 50 | 50 | 50 | |
| Trækstyrke / Tensile strength - N/mm ² | 25 | 30 | 35 | |

37.221/1G




Material: Grey
Size: 1.000 x 10.000 x 3 mm

38.14124 *




Anti slip plade. Gummigranulat.
Anti slip plate. Rubber granules.
8 x 100 x 200 mm
Min. order: 300

38.14572 *



Anti slip plade. Gummigranulat.
Anti slip plate. Rubber granules.
8 x 500 x 5000 mm
Min. order: 5 m

38.9971010 *



Græsmatte. Grå
Grass mat. Grey
900 mm x 16 m

38.9971020 *



Græsmatte. Grøn
Grass mat. Green
900 mm x 16 m

Gummimåtter / Rubber mats



Bus mats EU Semperit
Material: NR / NBR / NR-SBR

| Art. | Width (mm) | Thickness (mm) | Quality | Color | Insert |
|-------------|------------|----------------|-----------|-------|--------|
| 38.121N * | 1.400 | 1 | NBR | Black | 0 |
| 38.121NX * | 1.400 | 1 | NBR | Black | 0 |
| 38.1215N | 1.400 | 1,5 | NBR | Black | 0 |
| 38.122N * | 1.400 | 2 | NBR | Black | 0 |
| 38.123N * | 1.400 | 3 | NBR | Black | 0 |
| 38.124N * | 1.400 | 4 | NBR | Black | 0 |
| 38.125N * | 1.400 | 5 | NBR | Black | 0 |
| 38.125S * | 1.400 | 5 | NBR | Black | 0 |
| 38.126N * | 1.400 | 6 | NBR | Black | 0 |
| 38.128N | 1.400 | 8 | NBR | Black | 0 |
| 38.128NH | 1.400 | 8 | NBR | White | 0 |
| 38.128S * | 1.400 | 8 | NBR | Black | 0 |
| 38.130N * | 1.400 | 10 | NBR | Black | 0 |
| 38.132N * | 1.400 | 12 | NBR | Black | 0 |
| 38.135N * | 1.400 | 15 | NBR | Black | 0 |
| 38.139N * | 1.400 | 20 | NBR | Black | 0 |
| 38.1215 | 1.400 | 1,5 | NR / SBR | Black | 1 |
| 38.1215NH * | 1.400 | 1,5 | NR / SBR | White | 1 |
| 38.122 | 1.400 | 2 | NR / SBR | Black | 1 |
| 38.122A * | 1.400 | 2 | NR / SBR | Black | 2 |
| 38.123 * | 1.400 | 3 | NR / SBR | Black | 1 |
| 38.123X * | 1.400 | 3 | NR / SBR | Black | Smooth |
| 38.124 | 1.400 | 4 | NR / SBR | Black | 1 |
| 38.125 * | 1.400 | 5 | NR / SBR | Black | 1 |
| 38.126 * | 1.400 | 6 | NR / SBR | Black | 2 |
| 38.128 * | 1.400 | 8 | NR / SBR | Black | 2 |
| 38.128SX * | 1.400 | 8 | NBR / SBR | Black | Smooth |
| 38.130 | 1.400 | 10 | NR / SBR | Black | 2 |
| 38.132 * | 1.400 | 12 | NR / SBR | Black | 2 |
| 38.135 * | 1.400 | 15 | NR / SBR | Black | 0 |
| 38.136 * | 1.400 | 20 | NR / SBR | Black | 0 |
| 38.137 * | 1.400 | 25 | NR / SBR | Black | 0 |
| 38.138 * | 1.400 | 30 | NR / SBR | Black | 0 |
| 38.139 * | 1.400 | 30 | NR / SBR | Black | 0 |
| 38.140 * | 1.400 | 50 | NR / SNR | Black | 0 |
| 38.122EPDM | 1.400 | 2 | EPDM | Black | 0 |
| 38.123EPDM | 1.400 | 3 | EPDM | Black | 0 |



Rubber cork
Material: NR / NBR / NR-SBR

| Art. | Size (mm) | Thickness (mm) | Quality |
|-----------|----------------|----------------|---------|
| 38.201.5 | 1.000 x 1.000 | 1,5 | 1.235 |
| 38.202 | 1.000 x 1.000 | 2 | 1.235 |
| 38.203 | 1.000 x 1.000 | 3 | 1.235 |
| 38.204 | 1.000 x 1.000 | 4 | 1.235 |
| 38.205 | 1.000 x 1.000 | 5 | 1.235 |
| 38.205R * | 1.060 x 13.000 | 5 | 1.235 |

Min. order: 4 rl.